


# MAX-TILT / MAX-LIFT & TILT



## MAX-UPENDERS

*The MAX-UPENDERS are available for those special tilting requirements. Standard and custom models capacities to 6,000 lbs. Contact factory for more information.*

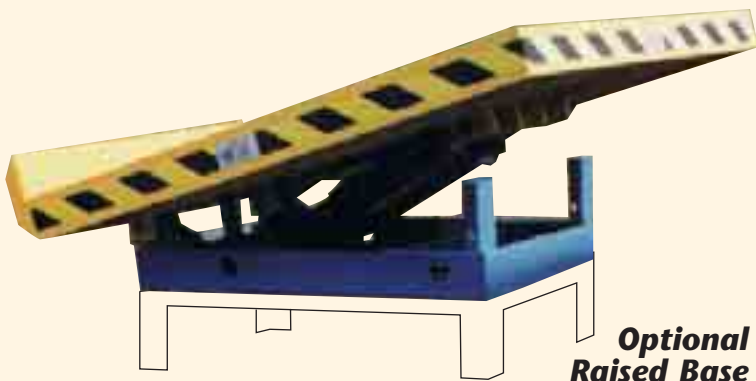

**Optional  
Raised Base**

*Lift Products MAX-TILT and MAX-LIFT & TILT tables are designed for those applications where tilting or lift and tilting the load provides for improved access to the product. Tables available with 45°, 60° or 90° tilt. Both series are electric hydraulic with the 45° models powered up and gravity down while the 60° and 90° models are powered both up and down with double acting cylinders. With capacities of 2,000 - 6,000 lbs., the MAX-series table can handle most applications.*

1 1/2 hp motor. 115/230 volt single phases or 230/460 3 phase voltage. Motor is internally mounted on most models and externally mounted on table sizes with 24" wide base.

Push button magnetic back control box standard with 6' cord.

10' power cord standard (connector not included).

Hydraulic gear pump with check valve, solenoid valve, filter and velocity fuse standard.

Smooth steel deck with 4" high lip on hinge end.

High quality chrome plated cylinder.

Control box includes magnetic starter transformer, thermal overload and fuses.

Designed for surface mount or lift table mounting. Contact factory for special in floor requirements.

Powered up on 45°, 60° and 90° tilt. Gravity down on 45° and powered down on 60° and 90° tilt.

Tilt limit switch.

Color yellow top with blue frame.

A 30 amp dedicated circuit is required for 115 volt operation.

Consult factory for special electrical requirements.

### OPTIONS:

Foot control switch.  
Tapered toe guards for pit mount.  
Lowering beeper.  
Remote power unit.  
Accordion bellows safety skirting.  
Special color.  
Adjustable tilt limit switch.  
Raised base.

*Specifications subject to change without notice.*

## MAX-LIFT & TILT 45°

MODEL	CAPACITY	PLATFORM		LOWERED HEIGHT	RAISED HEIGHT	UP SPEED		BASE SIZE	MOTOR
		STD	MAX			TILT	LIFT		
LPTTL-20-45-24	2000	24 x 36	48 x 60	17"	41"	16	10	24 x 36	1.5
LPTTL-20-45-36	2000	24 x 48	48 x 60	17"	53"	16	12	24 x 48	1.5
LPTTL-20-45-48	2000	25 x 64	48 x 64	17"	65"	16	25	25 x 64	1.5
LPTTL-40-45-24	4000	24 x 36	48 x 60	17"	41"	24	18	24 x 36	1.5
LPTTL-40-45-36	4000	24 x 48	48 x 60	17"	53"	24	19	24 x 48	1.5
LPTTL-40-45-48	4000	25 x 64	48 x 64	17"	65"	24	28	25 x 64	1.5
LPTTL-50-45-24	5000	24 x 36	48 x 60	17"	41"	26	20	24 x 36	1.5
LPTTL-50-45-36	5000	24 x 48	48 x 60	17"	53.3"	26	25	24 x 48	1.5
LPTTL-50-45-48	5000	25 x 64	48 x 64	17.3"	65.3"	26	42	25 x 64	1.5

## MAX-LIFT & TILT 60°

LPTTL-20-60-24	2000	24 x 36	48 x 60	17"	41"	24	10	24 x 36	1.5
LPTTL-20-60-36	2000	24 x 48	48 x 60	17"	53"	24	12	24 x 48	1.5
LPTTL-20-60-48	2000	25 x 64	48 x 60	17"	65"	24	25	24 x 64	1.5
LPTTL-30-60-24	3000	24 x 36	48 x 60	17"	41.3"	42	18	24 x 36	1.5
LPTTL-30-60-36	3000	24 x 48	48 x 60	17"	53.3"	42	24	24 x 48	1.5
LPTTL-30-60-48	3000	25 x 64	48 x 60	17"	65.3"	42	34	24 x 64	1.5
LPTTL-40-60-24	4000	24 x 36	48 x 60	17"	41.3"	44	20	24 x 36	1.5
LPTTL-40-60-36	4000	24 x 48	48 x 60	17"	53.3"	44	25	24 x 48	1.5
LPTTL-40-60-48	4000	25 x 64	48 x 60	17 1/4"	65.3"	44	42	24 x 64	1.5

**Other sizes available upon request - contact factory. Contact factory for 90° LIFT & TILT applications.**