


NEW!

MAX-M22 SERIES

LIFT TABLES



***A Great Value
In Lift Tables***

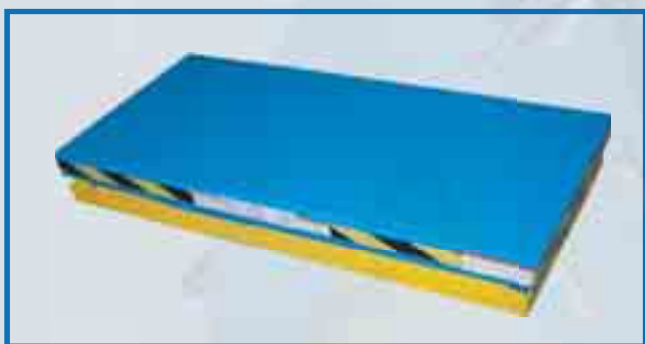

MAX-M22

LIFT PRODUCTS, INC.

PO Box 349 • Elm Grove, Wisconsin 53122-0349
262-860-1895 • FAX 262-860-1894 • Toll Free 877-LIFTPRO (877-543-8776)
www.liftproducts.com • email lpi@liftproducts.com

MAX-M22

Medium Duty Lift Table



2,200 lb Capacity
36" Vertical Travel
7.25" Lowered
43" Raised

Magnetic-backed control box or optional foot control allows operator to position the load at the ideal height



Motors and controls are easily accessible

4 Standard Tops Available
(others upon request)

High Quality Camrollers, Pivot Pins and Bearings

Integral, retractable maintenance safety bars

All welded construction meets AWS standard service

Tables conform to or exceed ANSI MH 29.1-1994

The best value in lift tables!

The MAX-M22 table line offers the following standard features:

- Trapped top and bottom scissor arms
- Built-in safety bars
- Life Time Lubricated Bearings
- Magnetic backed control box
- High quality fit and finish

MAX-M22

MODEL M22-36

Capacity	2,200 lbs
Edge Load Capacity *	1,500 lbs
Table Size Standard *	24" x 48"
Base Size	24" x 48"
Lowered Height	7.25"
Raised Height	43.25"
Vertical Travel	36"
Motor	1 HP
Voltage	115 V Single Phase


** Capacity is based on uniform load. Offset load with oversize tops can reduce capacity by 50%*




- Internally mounted 1 HP 115 Volt TENV motor. 115 Volt operating control voltage.
- NEMA constant pressure. Magnet backed up/down push button control station with 10' straight cord.
- NEMA – 1 prewired controls and electrical connectors. Control box contains contactor and control transformer.
- All controller components meet UL and/or CSA specifications.
- Cylinders with internal stops.
- 10 ft. power cord. (Connector not included)
- Hard chrome plated, polished shafting and hydraulic cylinder piston rods.
- Surface degreased, descaled and finished with Safety Yellow and Blue color.
- Smooth steel top with yellow and black safety stripes.
- S. A. E. hoses and fittings.
- Integral safety restraint maintenance bars.
- Internal gear pump with check valve, relief valve, solenoid valve.
- Includes hydraulic oil and filter.
- Limited warranty. 90 day repair or replacement on total product. 90 days on electrical components.
- Motors, pumps structure and cylinders are warrantied for 1 year.
- Specifications are subject to change without notice. Consult your dealer for current information.
- Lift Products, Inc. products are covered by Patents Pending or other rights reserved.

Standard Options Available

T1 – 36" x 48" Top
T2 – 48" x 48" Top
T3 - 42" x 60" Top
Foot Controls
Casters 2 Rigid / 2 Swivel with Brakes
Semi-Live Dolly Jack Handle and Casters
Accordion Safety Skirting
Custom Top Sizes
230 Volt Single Phase



Accordion Safety Skirting



Semi-Live Dolly Jack



Caster Frame Assembly