

NOTES:

1. ALL AXLES, ROLLERS AND PIVOT POINTS ARE EQUIPPED WITH LIFE-TIME LUBRICATED BEARINGS.
2. LIFT TO BE PAINTED AQ STANDARD ENAMEL.
3. MEETS OR EXCEEDS ANSI MH29.1 STANDARD FOR INDUSTRIAL SCISSORS LIFTS.

MODEL NO: _____

MAX CAPACITY: _____



LOWERED HEIGHT: _____

TRAVEL: _____

RAISED HEIGHT: _____

POWER UNIT, CONTROLS, AND ACCESSORIES PER QUOTATION.

MODEL	A (O.A.H. LOWERED)	B (O.A.H. RAISED)
36XLR	49 1/2"	85 1/2"
48XLR	61 1/2"	109 1/2"

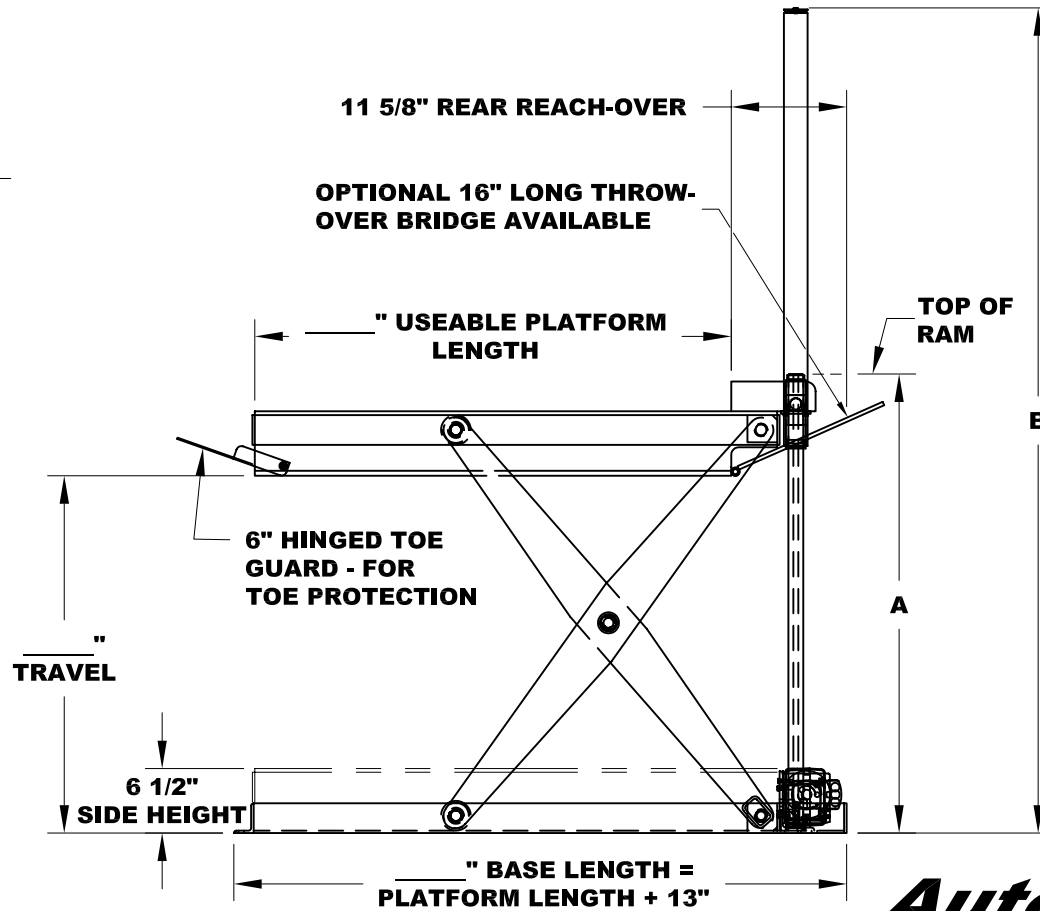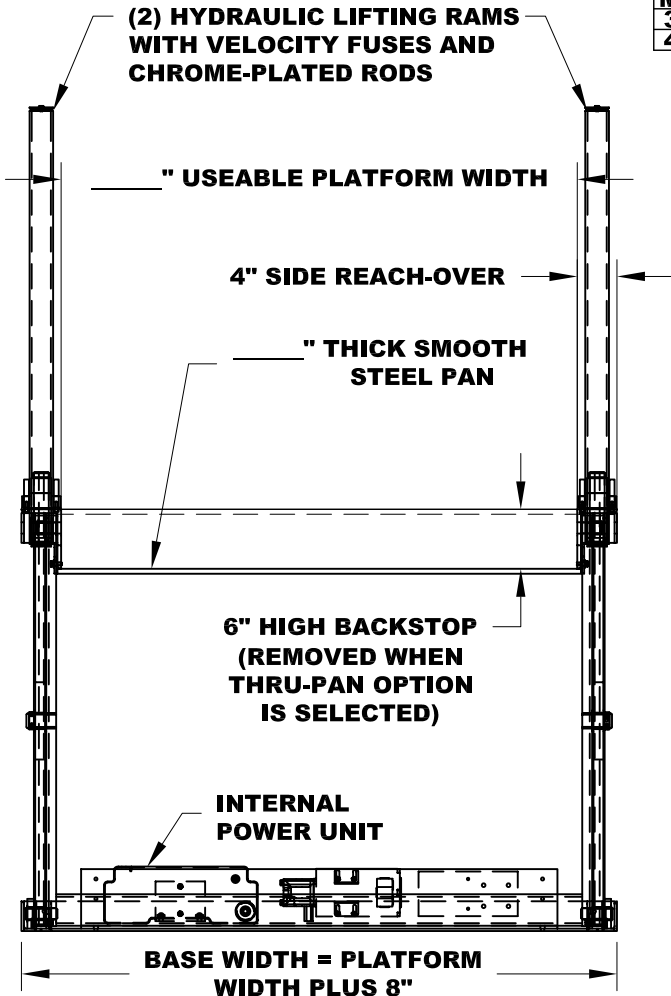

THIS PROPOSAL DRAWING IS GENERIC BY DESIGN AND IS FOR REFERENCE ONLY. PLEASE CONTACT AUTOQUIP FOR JOB SPECIFIC APPROVAL DRAWINGS.

MODEL XLR
LOW REACH PAN LIFT

PROPOSAL DRAWING
QUOTE NO. _____
826-0160-0 REV. 7/13/04

© COPYRIGHT RESERVED
AUTOQUIP CORPORATION
2006



AUTOQUIP CORP.
1058 W. INDUSTRIAL AVE.
GUTHRIE, OK 73044-1058
888-811-9876 WWW.AUTOQUIP.COM