

MAX-LIFT Scissor Lift Tables

The best value in lift tables with unparalleled features! Reduces awkward bending and lifting since the work load is always at the correct level. The possibility of back injuries is also reduced and productivity is increased.

The "Max-Lift" table line offers the following standard features:

- Trapped top and bottom scissor arms
- Built-in safety bars
- Grease fittings on pivot points and cam rollers
- Magnetic backed control box
- High quality fit and finish



Captured 'Lift-Lok' secures top and base leg rollers.



Magnetic Backed Hand Control-Standard

Zerk Fittings on Camrollers and Pivot Points



Optional Foot Control

High Quality Camrollers, Pivot Pins and Bearings

Specifications on pages 5, 6 & 7

Integral, retractable maintenance safety bars

All welded construction meets AWS standard service

Tables conform to or exceed ANSI MH 29.1-1994/2008



Motor & Controls are easily accessible.



Double Max-Lift

The Double High Max-Lift is available with 72" of vertical travel for those high lift requirements. 96" or 120" travel is also available for those special applications. Contact factory for more information.

Max-Lift With Rotating Top

All Max-Lift Tables are available with square, rectangular, or round rotating tops. A variety of rotating top options can be selected for your application.



DOUBLE HIGH MAX-LIFT TABLES

| VERTICAL TRAVEL | MODEL | CAPACITY (Lbs.) | EDGE LOADS | | PLATFORM SIZES | | BASE FRAME (INCHES)* | HEIGHT | | SHIP WT. (Lbs.) |
|-----------------|--------------|-----------------|------------|---------|----------------|---------|----------------------|---------|--------|-----------------|
| | | | STATIC | ROLLING | STANDARD | MAXIMUM | | LOWERED | RAISED | |
| 72" | LPT-20-72XXH | 2000 | 2000 | 1500 | 24 X 48 | 48 X 72 | 24 X 48 | 14.5 | 86.5 | 560 |
| 72" | LPT-25-72XXH | 2500 | 2500 | 2000 | 24 X 48 | 48 X 72 | 24 X 48 | 14.5 | 86.5 | 595 |
| 72" | LPT-30-72XXH | 3000 | 3000 | 2000 | 24 X 48 | 48 X 72 | 24 X 48 | 14.5 | 86.5 | 630 |
| 72" | LPT-35-72XXH | 3500 | 3000 | 2000 | 24 X 48 | 48 X 72 | 24 X 48 | 14.5 | 86.5 | 665 |
| 72" | LPT-40-72XXH | 4000 | 3000 | 2350 | 24 X 48 | 48 X 72 | 24 X 48 | 14.5 | 86.5 | 700 |
| 72" | LPT-45-72XXH | 5000 | 3500 | 2350 | 24 X 48 | 48 X 72 | 24 X 48 | 14.5 | 86.5 | 735 |
| 96" | LPT-20-96XXH | 2000 | 2000 | 1500 | 25 X 64 | 48 X 88 | 25 X 64 | 15 | 111 | 660 |
| 96" | LPT-25-96XXH | 2500 | 2500 | 2000 | 25 X 64 | 48 X 88 | 25 X 64 | 15 | 111 | 695 |
| 96" | LPT-30-96XXH | 3000 | 3000 | 2000 | 25 X 64 | 48 X 88 | 25 X 64 | 15 | 111 | 730 |
| 96" | LPT-35-96XXH | 3500 | 3000 | 2000 | 25 X 64 | 48 X 88 | 25 X 64 | 15 | 111 | 765 |
| 96" | LPT-40-96XXH | 4000 | 3000 | 2000 | 25 X 64 | 48 X 88 | 25 X 64 | 15 | 111 | 800 |

Internally mounted 1 1/2 hp. 115/230V-1-60 or 230/460-3-60 intermittent duty TENV super torque motor.

Specify voltage.

115V operating control voltage.

NEMA constant pressure. Magnet backed up-down push button control station with 10' straight or coiled cord.

NEMA - I prewired controls and electrical connectors. Control box contains contactor, control transformer, thermal overload and fuse.

All controller components meet UL and/or CSA specifications.

Cylinders with internal stops.

10 ft. power cord. (connector not included)

Hard, chrome plated, polished shafting hydraulic cylinder piston rods.

Surfaces degreased, descaled and finished with Safety Yellow and Blue enamel.

Smooth steel top with yellow and black safety stripes.

S.A.E. hoses and fittings.

Integral safety restraint maintenance bars.

Internal gear pump with check valve, relief valve, solenoid valve.

Includes hydraulic oil and filter.

Limited Warranty

90 day repair or replacement on total product. 90 days on electrical components, except motors. 5 years or 100,000 cycles on bearings. 5 years on structural.

Specifications are subject to change without notice. Consult your dealer for current information.

Lift Products, Inc. products are covered by Patents Pending and

other rights reserved.

OPTIONS:

- Foot control switch with a 10' cord.
- Accordion Skirting or Roller Curtain Skirting.
- Tapered Toe Guards for Pit Mounting.
- Rotating Top.
- Casters.
- Semi-live with Jack Handle.
- Special Controls.
- All Stainless Steel Top
- Perimeter Safety Bar
- Other Options Available

Contact Factory for Special Requirements.

CUSTOM CAPABILITIES

**D.C. Operated Lift Table.
 Manual or Self Propelled**




MAX-LIFT Table Options

Square or Round Turn-Table



**Caster Frame Assembly Available
 in low profile (shown) or std.
 height design**

Pop Up Ball Transfer Tops

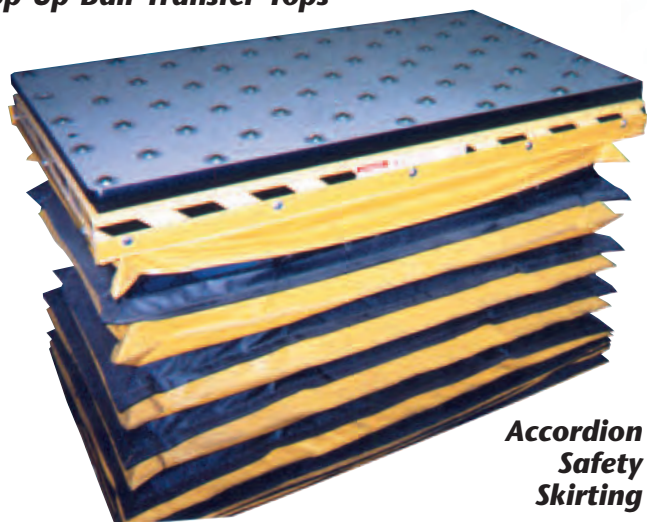

**Accordion
 Safety
 Skirting**



**Tapered Toe
 Guards for in floor
 Applications**



**Conveyor Top
 Powered or Gravity**



**Semi-Live with
 Dolly Jack**

Other Options Available: Stainless Steel Tops • Special Paint • Special Electrical Controls
Other Options: Contact Factory